

General

- Chip size from 0603 to 2817
- Resistance value from 2 mΩ to 700mΩ
- High power rating
- Low inductance 0.5nH to 5nH
- Low TCR
- Compatible with RoHS & Halogen free

Application

- Switching model power supply
- Battery pack
- Notebook, personal computer
- Test Instrument
- Power Amplifier


Electrical Specifications

Type	Power Rating at 70°C (W)	Resistance Range (mΩ)	TCR (ppm/°C)	Resistance tolerance	Operating Temperature
0603	0.5	5~9	±75	±1%(F)	-55°C~+155°C
		10~100	±50	±0.5%(D),±1%(F)	
0805	0.75	3	±75	±1%(F),±1.5%(E), ±2%(G)	
		4~500	±50	±0.5%(D),±1%(F)	
1206	0.5 1.0	3	±75	±1%(F),±1.5%(E), ±2%(G)	
		4~700	±50	±0.5%(D),±1%(F)	
2010	1.5	2~3	±100	±1%(F),±1.5%(E), ±2%(G)	
		4~9	±100	±1%(F)	
		10~700	±50	±0.5%(D),±1%(F)	
2512	2.0	2~3	±75	±1%(F),±1.5%(E), ±2%(G)	
		4~700	±50	±0.5%(D),±1%(F)	
2817	5.0	2	±50	±0.5%(D),±1%(F)	
		3~15	±30	±0.5%(D),±1%(F)	


Part Number Information

- | | | | | | | |
|------------|------------|------------|------------|------------|-------------|------------|
| <u>SMD</u> | <u>25</u> | <u>A</u> | <u>2</u> | <u>F</u> | <u>R003</u> | <u>T</u> |
| 【1】 | 【2】 | 【3】 | 【4】 | 【5】 | 【6】 | 【7】 |
- 【1】** Series Name: SART Metal Foil Type
【2】 Chip size: 06:0603 08: 0805 12: 1206 20: 2010 25: 2512 28:2817
【3】 Material Code: A:Alloy
【4】 Power Code:A: 0.5W B: 1.5W C: 0.75W 1: 1W 2: 2W 5:5W
【5】 Resistance Tolerance: F: $\pm 1\%$ D: $\pm 0.5\%$ E: $\pm 1.5\%$ G: $\pm 2\%$
【6】 Resistance Code: R002 = 2 m Ω R050 = 50 m Ω R200 =200 m Ω
【7】 Packaging Code: T:Tape& Reel B: Bulk Pack


Dimensions

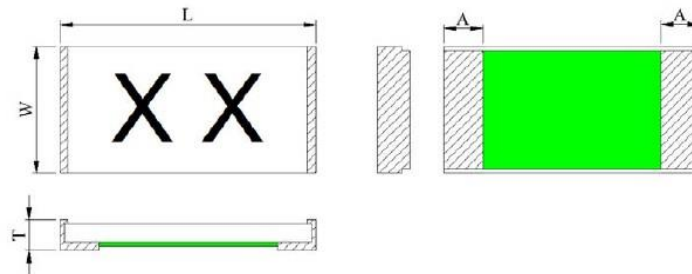

Type	Resistance Range (m Ω)	L (mm)	W (mm)	T (mm)	A (mm)
0603	5	1.70 \pm 0.20	0.90 \pm 0.20	0.65 \pm 0.20	0.50 \pm 0.20
	6~100	1.70 \pm 0.20	0.90 \pm 0.20	0.65 \pm 0.20	0.40 \pm 0.20

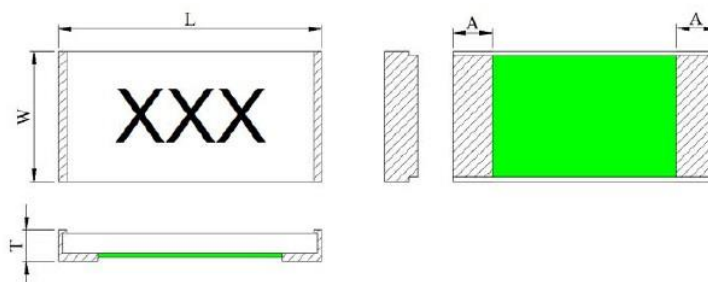


Type	Resistance Range (m Ω)	L (mm)	W (mm)	T (mm)	A (mm)
0805	3	2.10 \pm 0.20	1.35 \pm 0.20	0.65 \pm 0.20	0.65 \pm 0.20
	4~500	2.10 \pm 0.20	1.35 \pm 0.20	0.65 \pm 0.20	0.50 \pm 0.20

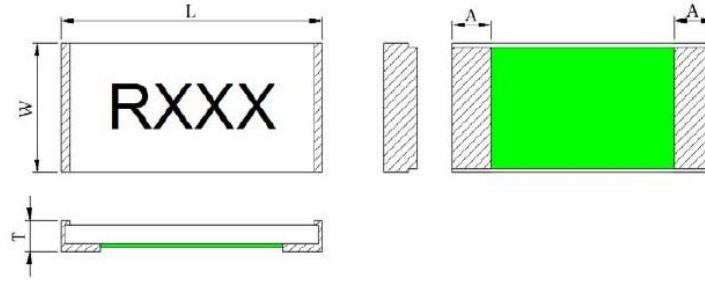


Type	Resistance Range (mΩ)	L (mm)	W (mm)	T (mm)	A (mm)
1206	3~700	3.30±0.20	1.70±0.20	0.65±0.20	0.68±0.30
2010	2~3	5.10±0.20	2.60±0.20	0.65±0.20	2.10±0.30
	4~700	5.10±0.20	2.60±0.20	0.65±0.20	0.70±0.30
2512	2	6.40±0.30	3.20±0.30	0.65±0.20	2.80±0.30
	3	6.40±0.30	3.20±0.30	0.65±0.20	2.60±0.30
	4~700	6.40±0.30	3.20±0.30	0.65±0.20	1.05±0.30
2817	2~3	7.10±0.30	4.30±0.30	0.80±0.20	2.50±0.30
	4~15	7.10±0.30	4.30±0.30	0.80±0.20	1.00±0.30

Recommended Land Patterns

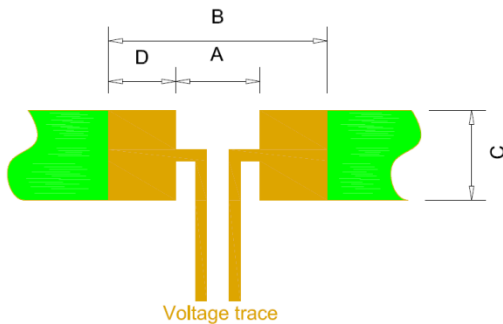


Type	Resistance Range (mΩ)	A (mm)	B (mm)	C (mm)	D (mm)
0603	5	0.50	3.20	0.92	1.35
	6~100	0.60	3.20	0.92	1.30
0805	3	0.50	3.60	1.44	1.55
	4~500	0.80	3.60	1.44	1.40
1206	3~700	1.20	4.80	1.84	1.80
2010	2~3	0.70	8.00	2.88	3.65
	4~700	2.70	8.00	2.88	2.65
2512	2	0.60	9.30	3.57	4.35
	3	0.90	9.30	3.57	4.20
	4~700	3.10	9.30	3.57	3.10
2817	2~3	1.50	9.10	4.80	3.80
	4~15	4.50	9.10	4.80	2.30

Materials

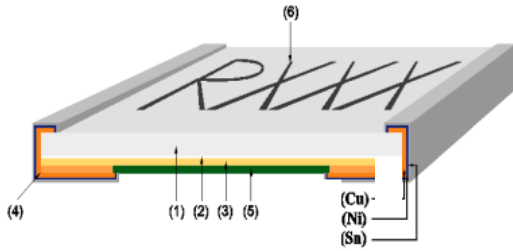

No.	Materials	No.	Materials
1	Ceramic	4	Terminal electrode
2	Epoxy	5	Coating
3	Cu-Alloy	6	Marking


Temperature Derating Curve

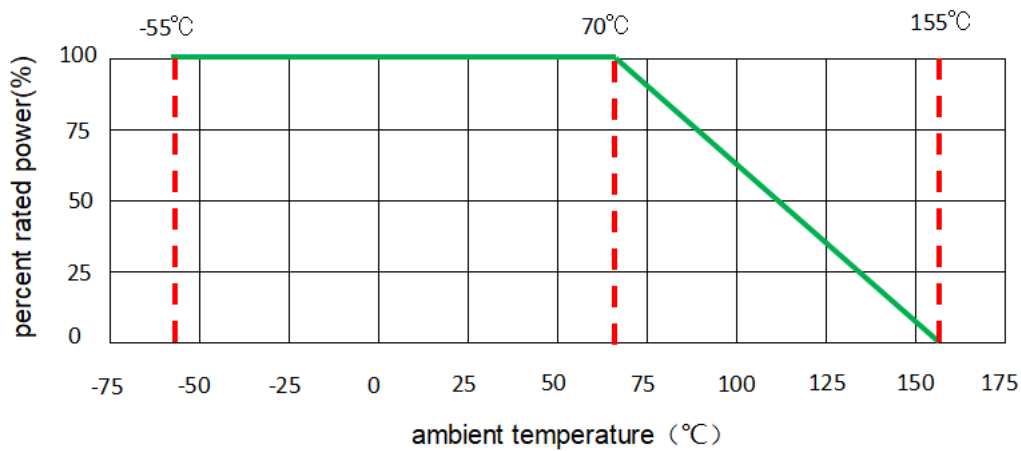

Recommended Solder Curve

1. Infrared Reflow

- Temperature: 260°C
- Time: 5sec Max.
- Recommend Reflow profile:

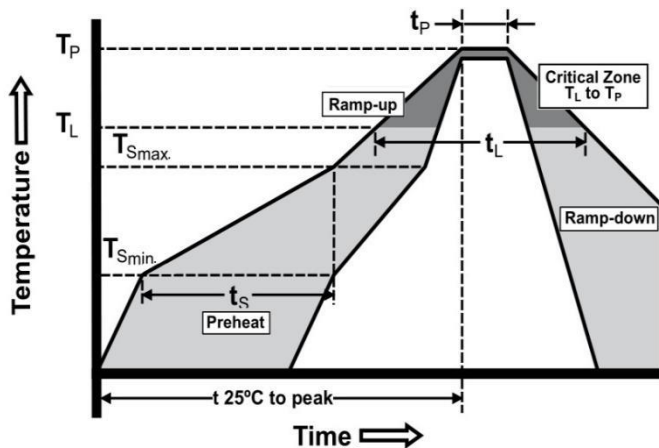

Profile Feature	Pb-Free Assembly
Average Ramp-up Rate (T _{Smax} to T _p)	3°C/sec Max.
Preheat Temperature Min. (T _{Smin}) Temperature Max. (T _{Smax}) Time (T _{Smin} to T _{Smax})	150°C 200°C 60sec~120sec
Peak Temperature (T _p)	260°C
Time within 5°C of actual Peak Temperature (T _p)	5sec
Melting tin time (T _L)	20sec~30sec
Ramp-down Rate	6°C/sec Max.
Time 25°C to peak Temperature	8min Max.

2. Wave soldering

- Reservoir Temperature: 260°C
- Time in Reservoir: 10sec Max.

3. Hand Soldering


- Temperature: 350°C
- Time: 5sec Max.

Product Characteristics


Item	Test condition / Methods	Performance	Standard
Short Time Overload	0603/0805/1206/2512 $R \leq 10m\Omega$; $P = 5*Pr$; $T = 25^{\circ}C \pm 2^{\circ}C$, $t = 5sec$ Rest specifications: $P = 2.5*Pr$; $T = 25^{\circ}C \pm 2^{\circ}C$, $t = 5sec$	$ \Delta R \leq \pm(1\% + 0.5 m\Omega)$	IEC 60115-1 4.13
Temperature Coefficient of Resistance (TCR)	$TCR = \frac{R - R_0}{R_0(T_2 - T_1)} \times 10^6$ 2817 test temperature: $+25^{\circ}C \sim +85^{\circ}C$ $+25^{\circ}C \sim +125^{\circ}C$ Rest test temperature: $+25^{\circ}C \sim +125^{\circ}C$	Refer to SART Spec	IEC 60115-1 4.8
Thermal Shock	$-55^{\circ}C(30min)/+155^{\circ}C(30min)$, 100 cycles	$ \Delta R \leq \pm(1\% + 0.5 m\Omega)$	IEC 60115-1 4.19
Resistance to Solder Heat	$275^{\circ}C \pm 5^{\circ}C$, 20sec \pm 1sec	$ \Delta R \leq \pm(1\% + 0.5m\Omega)$	IEC 60115-1 4.18
Solderability	$245^{\circ}C \pm 5^{\circ}C$, 3.0sec \pm 0.5sec	95% coverage Min.	IEC 60115-1 4.17
Load Life	$70^{\circ}C \pm 2^{\circ}C$, 1000 hours ,at rated power 1.5hours "ON", 0.5hours "OFF"	$ \Delta R \leq \pm(2\% + 0.5 m\Omega)$	IEC 60115-1 4.25.1
Moisture Load Life (60°C、95%RH)	$T = 60^{\circ}C \pm 2^{\circ}C$; RH=95%; $V_{test} = V_{max}$. $t = 90min ON$, 30min OFF, 1000hours	$ \Delta R \leq \pm(2\% + 0.5 m\Omega)$	IEC 60115-1 4.24
Bending test	Bending width 2mm, Epoxy thickness 1.6mm, Fulcrums distance 90mm	$ \Delta R \leq \pm(1\% + 0.5 m\Omega)$	IEC 60115-1 4.33
High Temp. Exposure	$T = +155^{\circ}C \pm 2^{\circ}C$; $t = 1000$ hours	$ \Delta R \leq \pm(1\% + 0.5 m\Omega)$	IEC60115-1 4.25
Low Temp. Storage	$T = -55^{\circ}C \pm 2^{\circ}C$; $t = 1000$ hours	$ \Delta R \leq \pm(1\% + 0.5 m\Omega)$	IEC60115-1 4.25
Mechanical Shock	$a = 100G$, $t = 6msec$, 5 times shock	$ \Delta R \leq \pm(1\% + 0.5 m\Omega)$	IEC60115-1 4.21

Packaging

1. Tape Packaging Dimensions

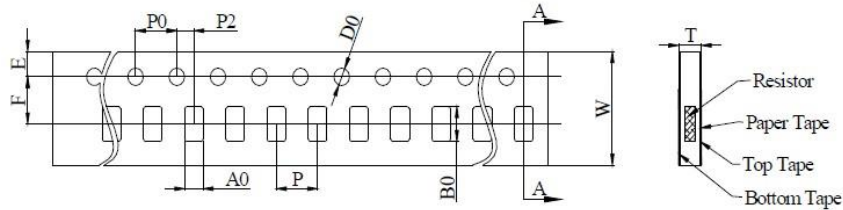


Type	A0 (mm)	B0 (mm)	W (mm)	F (mm)	E (mm)	T (mm)
0603	1.10±0.10	1.90±0.10	8.00±0.30	3.50±0.10	1.75±0.10	0.75±0.10
0805	1.55±0.10	2.30±0.10	8.00±0.30	3.50±0.10	1.75±0.10	0.87±0.10
1206	2.05±0.20	3.65±0.20	8.00±0.30	3.50±0.10	1.75±0.10	0.87±0.10
Type	P (mm)	P0 (mm)	P2 (mm)	D0 (mm)	/	/
0603	4.00±0.10	4.00±0.10	2.00±0.10	1.50±0.10	/	/
0805	4.00±0.10	4.00±0.10	2.00±0.10	1.50±0.10	/	/
1206	4.00±0.10	4.00±0.10	2.00±0.10	1.50±0.10	/	/

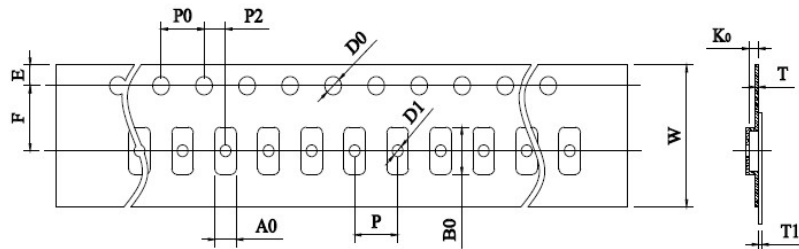

Type	A0 (mm)	B0 (mm)	W (mm)	F (mm)	E (mm)	T (mm)
2010	2.85±0.20	5.45±0.20	12.00±0.30	5.50±0.10	1.75±0.10	0.25±0.10
2512	3.40±0.20	6.75±0.20	12.00±0.30	5.50±0.10	1.75±0.10	0.25±0.10
2817	4.60±0.20	7.50±0.20	12.00±0.30	5.50±0.10	1.75±0.10	0.25±0.10
Type	P (mm)	P0 (mm)	P2 (mm)	D0 (mm)	T1 (mm)	K0 (mm)
2010	4.00±0.10	4.00±0.10	2.00±0.10	1.50±0.10	0.1 Max.	0.80±0.20
2512	4.00±0.10	4.00±0.10	2.00±0.10	1.50±0.10	0.1 Max.	1.00±0.20
2817	8.00±0.10	4.00±0.10	2.00±0.10	1.50±0.10	0.1 Max.	1.00±0.20

2. Reel Dimensions

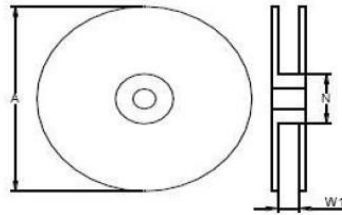


Type	A (mm)	N (mm)	W1 (mm)
0603	178.00±5.00	60.00±2.00	9.00±1.00
0805	178.00±5.00	60.00±2.00	9.00±1.00
1206	178.00±5.00	60.00±2.00	9.00±1.00
2010	178.00±5.00	60.00±2.00	13.00±1.00
2512	178.00±5.00	60.00±2.00	13.00±1.00
2817	178.00±5.00	60.00±2.00	13.00±1.00

Quantity of Package

Type	Quantities (PCS)
0603/0805/1206	5000
2010/2512	4000
2817	2000

Peeling Test

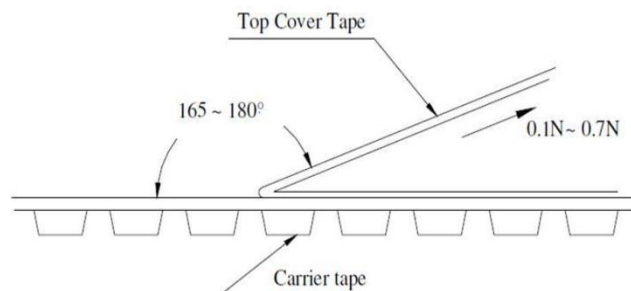

Storage

- The ambient temperature shall be between 5°C~30°C.
- The relative humidity recommended for storage is between 25%RH~60%RH.
- Sealed plastic bags with desiccant shall be used to reduce the oxidation of the termination and shall only be opened prior to use. The products shall not be stored in areas where harmful gases containing sulfur or chlorine are present.