



General

- Fast acting
- Surface mount high current fuse
- Higher voltage rating up to 85VDC
- 7.3mm×5.8mm×4.2mm rectangle shape surface mount
- -55°C to 125°C Operating temperature
- Excellent environmental integrity
- Enhanced thermal cycling endurance
- Halogen Free
- Pb Free

Agency / Certificate Information

Agency	File Number	Ampere Range
	E527955	20A~125A
	J50657759	20A~125A

Application

- Storage system power
- Cooling fan system for PC server
- Voltage regulator module
- Base station power supply
- Voltage regulator module for PC server
- High end servers / Blade computing
- Battery Management System

Electrical Specifications


Part Number	Current Rating (A)	Voltage Rating (V)	Interrupting Rating	Typical Cold DCR* (mΩ)	Typical I ² T** (A ² sec)
S7358-F-20A	20	85	UL&TUV DC85V1500A	2.40	231
S7358-F-30A	30	85		1.23	400
S7358-F-40A	40	85		0.88	812
S7358-F-50A	50	85		0.72	1180
S7358-F-60A	60	85		0.60	1700
S7358-F-80A	80	85		0.50	3000
S7358-F-100A	100	85		0.45	4400
S7358-F-125A	125	85		0.35	8200

* Measured at ≤10% rated current and 25°C

** Melting I²T at 10 times of rated current

Part Number Information

S 7358-F-40A

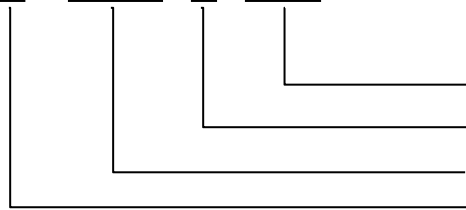



"40A" Ampere Rating: 40A

"F" Electrical Characteristic: F=Fast Acting

"7358" Size Number: 7358=7.3mm*5.8mm


"S" Symbol of SART

Dimensions

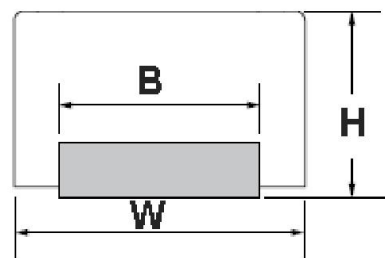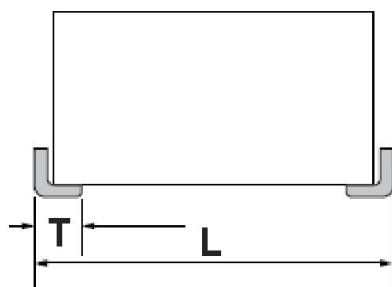

Type	L (mm)	W (mm)	H (mm)	T (mm)	B (mm)
S7358-F	7.30±0.50	5.80±0.30	4.20±0.30	1.00±0.30	4.00±0.30

Recommended Land Patterns

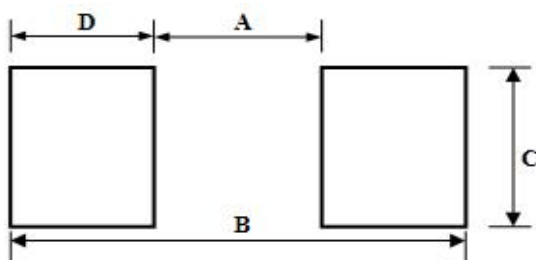

Materials


Components	Material
Body	Ceramic
Element	Tin Plated Copper

Type	A(mm)	B(mm)	C(mm)	D(mm)
S7358-F	4.40±0.30	9.80±0.30	5.80±0.30	2.70±0.30


Dimensions of Standard Test Board

Type	Ampere Rating	Board Thickness (mm)	Copper Layer Thickness (mm)	Copper Trace Width (mm)
S7358-F	20A~50A	1.6	0.105	22
	60A~125A	1.6	0.210	33

Time Current Curve

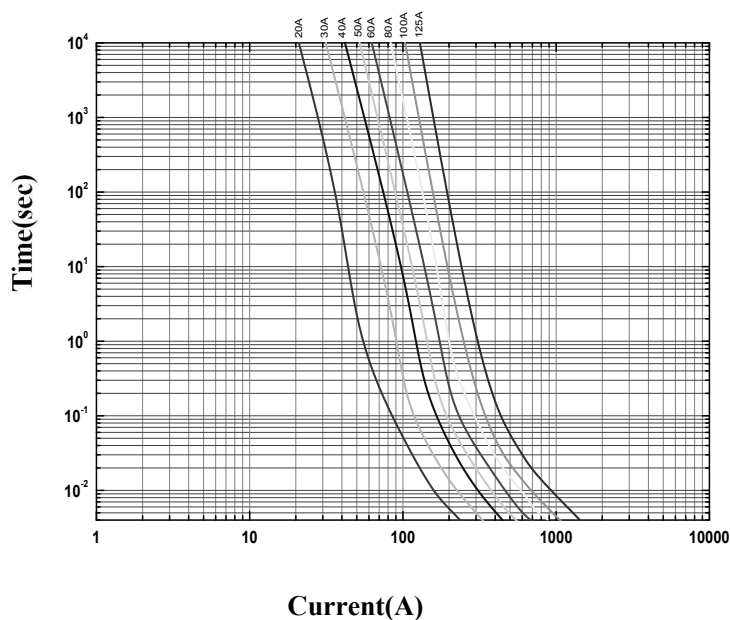


I^2T VS Time Curve

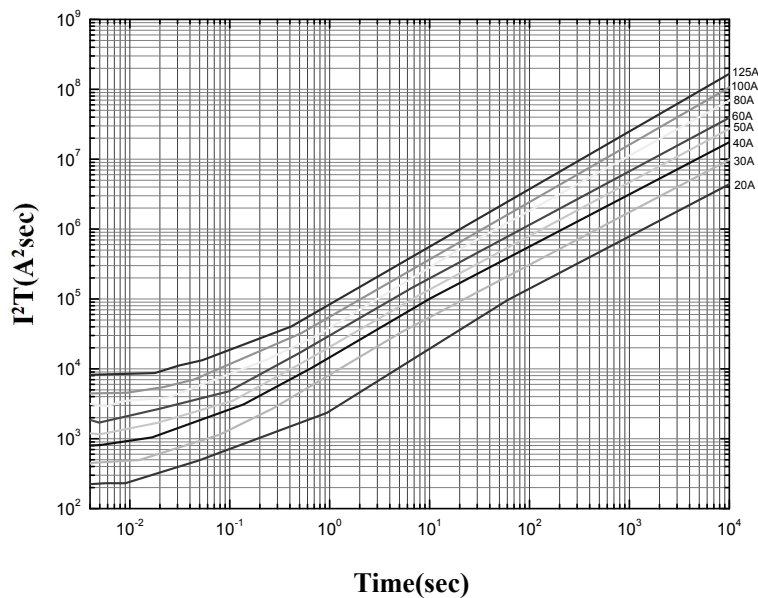

Electrical Characteristics

Type	Ampere Rating	% of Current Rating	Opening Time
S7358-F	20A~125A	100	4hours Min.
	20A~125A	250	60sec Max.
	20A~125A	1000	1msec Min.

Temperature Derating Curve

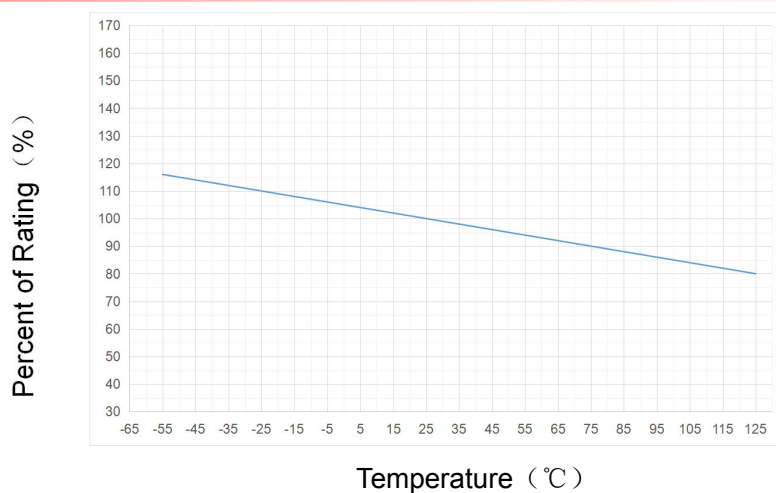


Product Characteristics

Item	Test condition/ Methods	Performance	Standard
Time/Current	100% of current rating	No Fusing, 4hours Min.	UL248-14
	250% of current rating	$\leq 60\text{sec}$	SART SPEC
	1000% of current rating	$\geq 1\text{msec}$	IEC60127-4
Solderability	$240^{\circ}\text{C} \pm 5^{\circ}\text{C}$, 3sec $\pm 0.5\text{sec}$	95% coverage Min.	IEC60127-4 IEC60068-2-20; MIL-STD-202
Insulation Resistance	Test Condition A, 0.01M Ω Min.	0.01M Ω Min.	MIL-STD-202 Method 302
Resistance to Soldering	$260^{\circ}\text{C} \pm 5^{\circ}\text{C}$, 10sec $\pm 0.5\text{sec}$	$ \Delta R $: <10%	MIL-STD-202 Method 210
Interrupting Ability	DC85V1500A	without permanent arcing, ignition and bursting of fuse link	UL248-14 IEC60127-7
Moisture Resistance	Temperature Humidity, T: $85^{\circ}\text{C} \pm 3^{\circ}\text{C}$, RH: 85% $\pm 5\%$, Duration: 1000 hours	$ \Delta R $: <10%	MIL-STD-202 Method 106
Moisture Sensitivity Level	Level 1	$ \Delta R $: <10%	J-STD-020
Salt Spray	5% salt solution, 72 hours	$ \Delta R $: <10%	MIL-STD-202 Method 101
Thermal Shock	Test Condition B: 300 cycles, -65°C to $+125^{\circ}\text{C}$	$ \Delta R $: <10%	MIL-STD-202 Method 107
Vibration	Amplitude 10Hz $\sim$ 55Hz in 1 min. 2 hours each XYZ, total 6 hours	$ \Delta R $: <10%	MIL-STD-202 Method 201
Mechanical shock	Test Condition I (100 G's peak for 6 msec)	$ \Delta R $: <10%	MIL-STD-202 Method 213

Recommended Solder Curve

1. Infrared Reflow:


- Temperature: 260°C
- Time: 20sec Max.
- Recommend Reflow profile

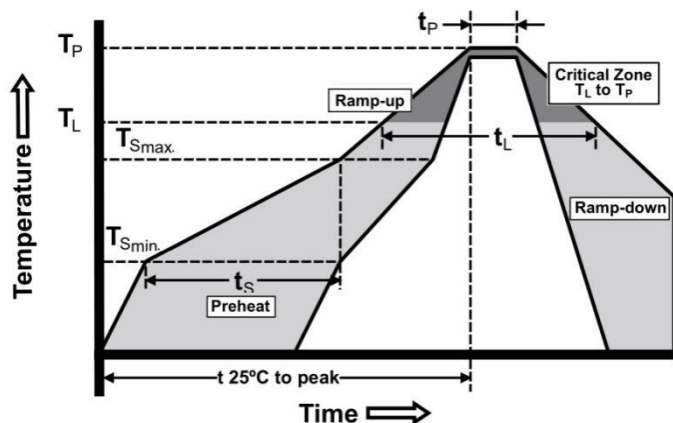


Profile Feature	Pb-Free Assembly
Average Ramp-up Rate(T_{Smax} to T_P)	3°C/sec Max.
Preheat Temperature Min. (T_{Smin}) Temperature Max. (T_{Smax}) Time (T_{Smin} to T_{Smax})	150°C 200°C 60sec~120sec
Peak Temperature (T_P)	260°C
Time within 5°C of actual Peak Temperature (t_P)	20sec
Temperature (T_L)	217°C
Melting tin time (t_L)	60sec~150sec
Ramp-down Rate	6°C/sec Max.
Time 25°C to peak Temperature	8min Max.

Packaging

1000 pieces of fuses on 16mm tape-and-reel on 13 inch (330mm) reel

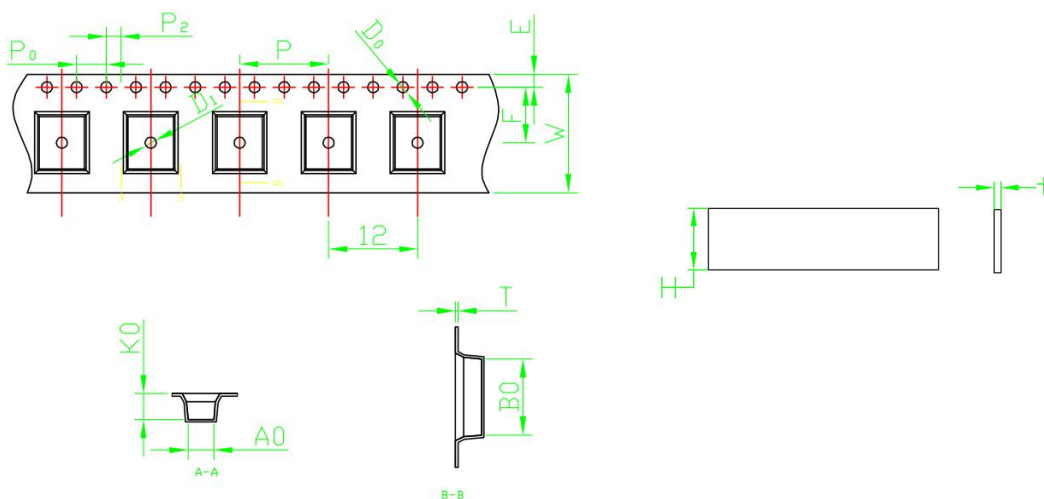

Type	A0(mm)	B0(mm)	K0(mm)	P0(mm)	P(mm)	P2(mm)	E(mm)
S7358-F	6.20±0.20	8.00±0.20	4.70±0.15	4.00±0.15	12.00±0.15	2.00±0.10	1.75±0.15
Type	F(mm)	D0(mm)	D1(mm)	W(mm)	T(mm)	H(mm)	t(mm)
S7358-F	7.50±0.15	1.50 ^{+0.10} ₋₀	1.50 ^{+0.10} ₋₀	16.00±0.40	0.35±0.05	13.30±0.20	0.055 ^{+0.015} _{-0.007}

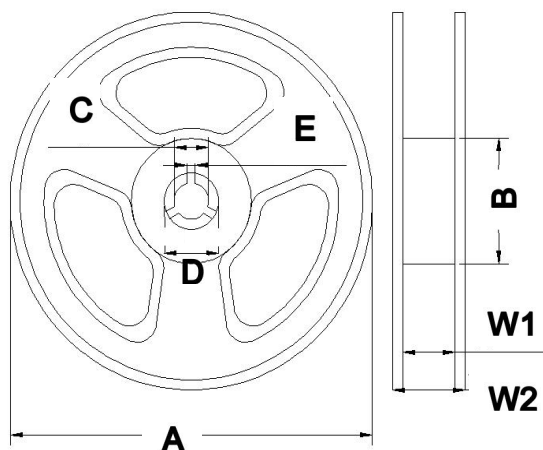

Type	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	W1(mm)	W2(mm)
S7358-F	330.0±2.0	100.0±1.5	13.0±0.5	21.0±0.5	2.2±0.2	16.5±0.3	20.5±2.5

Storage

- The ambient temperature recommended for storage shall be between 5℃~30℃.
- The relative humidity recommended for storage shall be between 25%RH~60%RH.
- Sealed plastic bags with desiccant shall be used to reduce the oxidation of the termination and shall only be opened prior to use.
- The products shall not be stored in areas where harmful gases containing sulfur or chlorine are present.